



角接触球轴承


d 25-30mm-3005-B-TVH

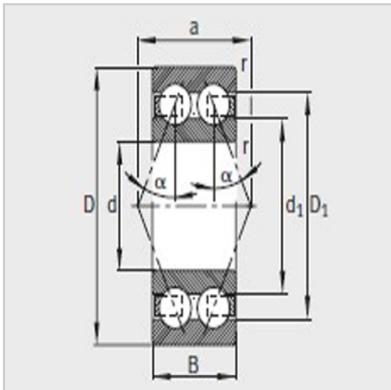

38..-B、30..-B、32..-B、33..-B
 = 25 °

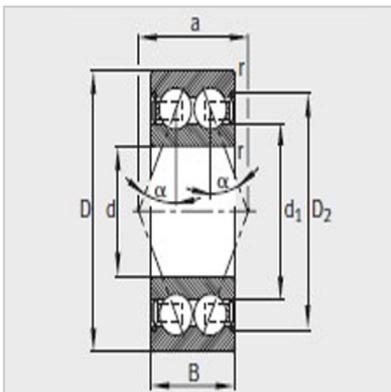

38..-B-2Z、30..-B-2Z、32..-B-2Z、33..-B-2Z
 = 25 °

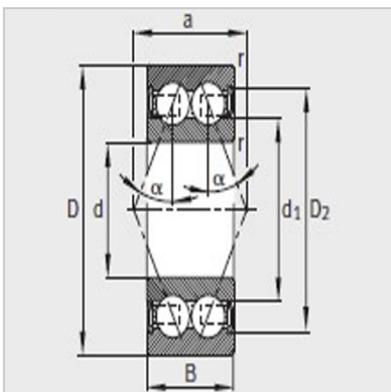

38..-B-2RSR、30..-B-2RSR、
 32..-B-2RSR、33..-B-2RSR
 = 25

型号 :	3005-B-TVH
质量m kg :	0.1

尺寸mm :

d :	25
D :	47
B :	16
rmin :	0.6
D ₁ :	-
D ₂ :	-
d ₁ :	29.8
a :	21.2

安装尺寸mm :

d _a min :	28.2
D _a max :	43.8
ramax :	0.6


基本额定载荷N :

动载荷 C _r :	15500
静载荷 C _{or} :	11100

疲劳极限载荷Cur/ N :	560
----------------	-----

极限转速 nG /min - 1 :	13000
--------------------	-------

参考转速nB/min - 1 :	11200
------------------	-------

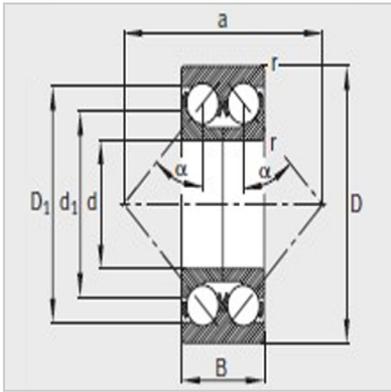

33..-DA
双内圈
= 45 °



: