



主轴轴承

d 30-50mm-B7008-E-T-P4S

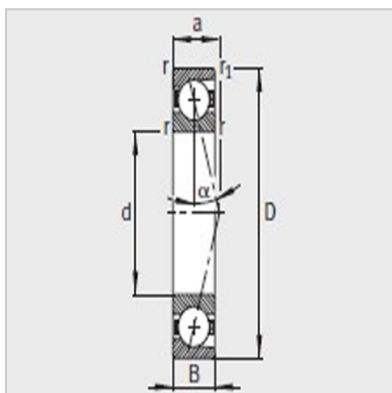

B719..-C、B70..-C、B72..-C
 $\alpha = 15^\circ$

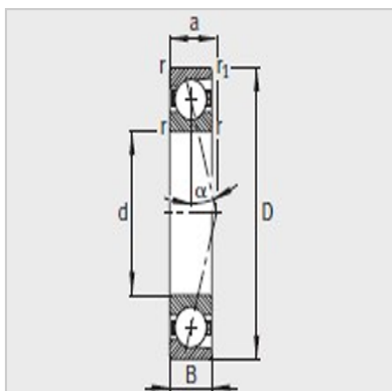

B719..-E、B70..-E、B72..-E
 $\alpha = 25^\circ$



型号： B7008-E-T-P4S

质量 $m \approx \text{kg}$: 0.195

尺寸 mm :

d :	40
D :	68
B :	15
r _{min} :	1
r _{1min} :	1
a $\approx$:	20

安装尺寸 mm :

d _a h12 :	46
D _a H12 :	62
r _{amax} :	1
r _{a1max} :	0.3

基本额定载荷 N :

动载荷 C _r :	19600
静载荷 C _{or} :	15000

疲劳极限载荷 C_{ur}/ N : 1100

极限转速 min-1 :

n _G 脂 :	19000
n _G 油 :	32000