



## 主轴轴承

d 30-50mm-B7206-E-T-P4S

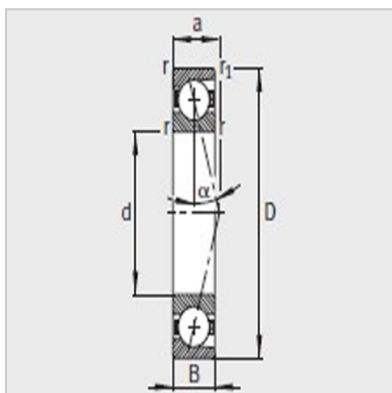

B719..-C、B70..-C、B72..-C  
 $\alpha = 15^\circ$

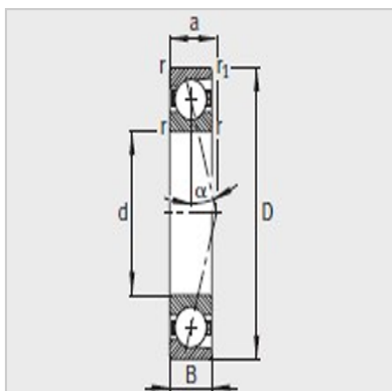

B719..-E、B70..-E、B72..-E  
 $\alpha = 25^\circ$



型号： B7206-E-T-P4S

质量  $m \approx \text{kg}$  : 0.196

尺寸 mm :

|                     |    |
|---------------------|----|
| d :                 | 30 |
| D :                 | 62 |
| B :                 | 16 |
| r <sub>min</sub> :  | 1  |
| r <sub>1min</sub> : | 1  |
| a $\approx$ :       | 19 |

安装尺寸 mm :

|                      |      |
|----------------------|------|
| d <sub>a</sub> h12 : | 37.5 |
| D <sub>a</sub> H12 : | 54.5 |
| r <sub>amax</sub> :  | 1    |
| r <sub>a1max</sub> : | 1    |

基本额定载荷 N :

|                |       |
|----------------|-------|
| 动载荷 $C_r$ :    | 22000 |
| 静载荷 $C_{or}$ : | 14000 |

疲劳极限载荷  $C_{ur}/N$  : 1470

极限转速 min-1 :

|                    |       |
|--------------------|-------|
| n <sub>G</sub> 脂 : | 22000 |
| n <sub>G</sub> 油 : | 36000 |